


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3w磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.61 lm/W
MODEL	DC12V	I _{max} (cd)	776.9	S/MH (C0/180)	0.40	
NOMINAL POWER(W)	3	LOR (%)	100.0	S/MH (C90/270)	0.56	
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	227.61	□ UP,DN (C0-180)	0.0,42.5	
NOMINAL FLUX(lm)	227.611	CIE CLASS	DIRECT	□ UP,DN (C180-360)	0.0,57.5	
LAMPS INSIDE	1	□ up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	219.5	□ down (%)	100.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

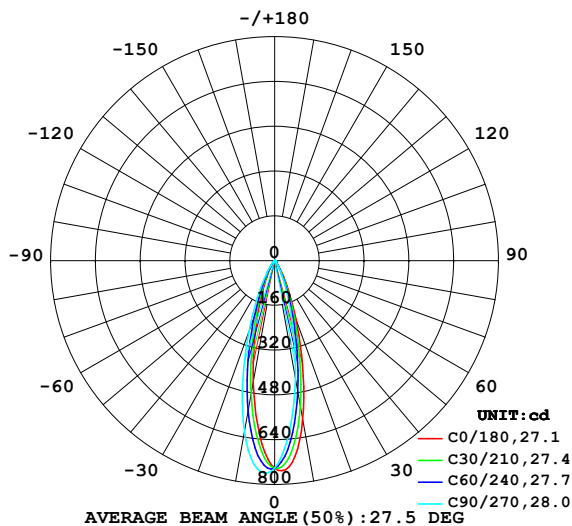

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

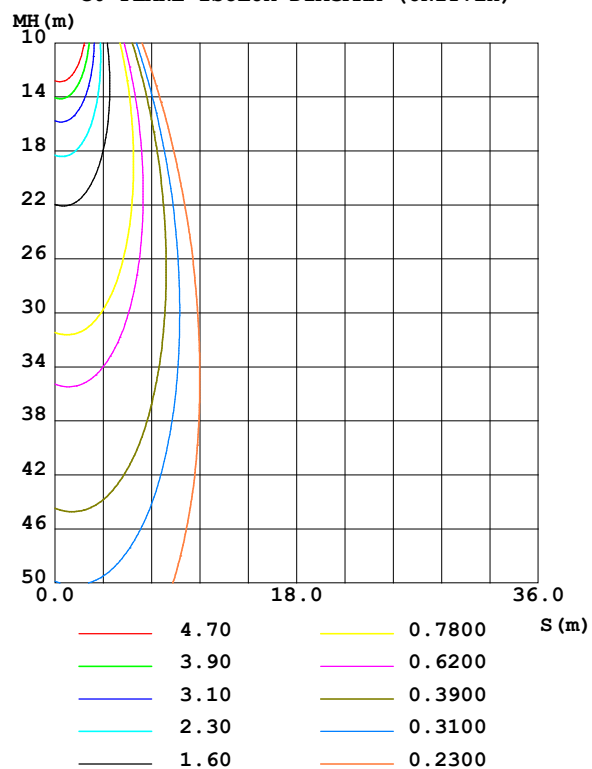

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: XLEN
Test Date: 2022-06-17

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity: 65.0%
Test Distance: 9.420m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	578.0	506.1	429.1	395.7	441.8	510.6	621.8	670.5	0- 10	59.39	59.39	26.1,26.1
20	224.8	180.8	141.2	123.9	149.5	193.5	270.1	294.8	10- 20	93.51	152.9	67.2,67.2
30	57.34	43.52	34.69	29.60	36.93	49.59	73.68	80.25	20- 30	48.99	201.9	88.7,88.7
40	14.63	10.98	9.441	8.129	10.09	12.61	18.30	18.91	30- 40	16.67	218.6	96,96
50	4.680	3.352	2.891	2.526	3.190	4.006	5.586	5.629	40- 50	5.729	224.3	98.5,98.5
60	1.571	1.038	1.165	0.9580	1.045	1.353	1.918	1.803	50- 60	2.125	226.4	99.5,99.5
70	0.7673	0.4440	0.4551	0.3019	0.3887	0.5826	0.7862	0.8626	60- 70	0.9115	227.3	99.9,99.9
80	0.0183	0	0	0	0	0.0063	0	0.0789	70- 80	0.2823	227.6	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0012	227.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 222.12 lm

%lum = 97.6%

%lamp = 97.6%

Conical surface Flux(130deg): 226.95 lm

%lum = 99.7%


%lamp = 99.7%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:XLEN
 Test Date:2022-06-17

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

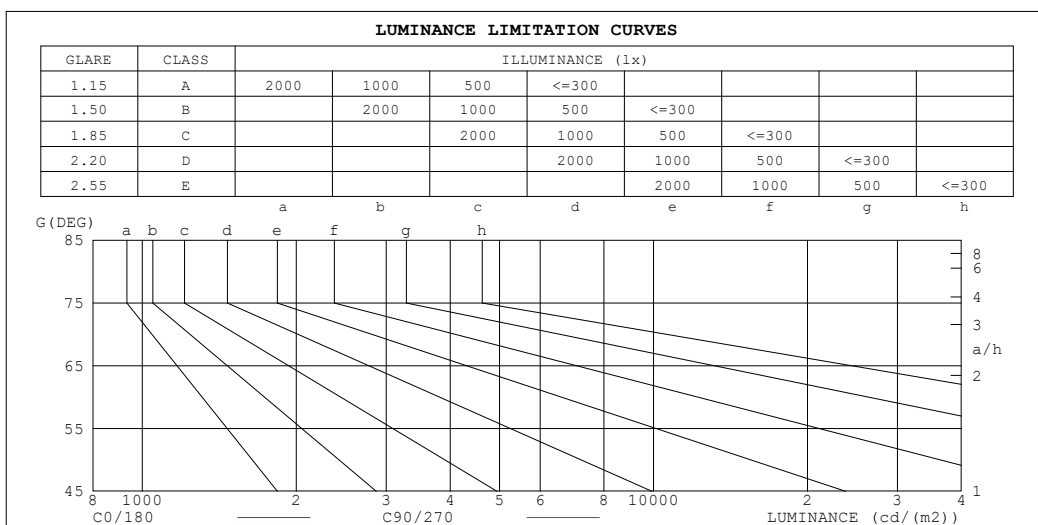


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: XLEN
Test Date: 2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity: 65.0%
Test Distance: 9.420m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.61lx1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96														
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.95	.96	.94	.93	.91														
3.0	1.01	.97	.93	.99	.96	.93	.97	.94	.91	.95	.92	.90	.92	.90	.88	.87														
4.0	.96	.91	.88	.95	.91	.88	.93	.89	.87	.91	.88	.86	.89	.87	.85	.83														
5.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.88	.84	.82	.86	.83	.81	.80														
6.0	.88	.83	.80	.87	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.78	.77														
7.0	.84	.79	.76	.84	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74														
8.0	.81	.76	.73	.80	.76	.73	.79	.75	.73	.79	.75	.72	.78	.74	.72	.71														
9.0	.78	.73	.70	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.69	.68														
10.0	.75	.71	.68	.75	.70	.68	.74	.70	.67	.73	.70	.67	.73	.69	.67	.66														

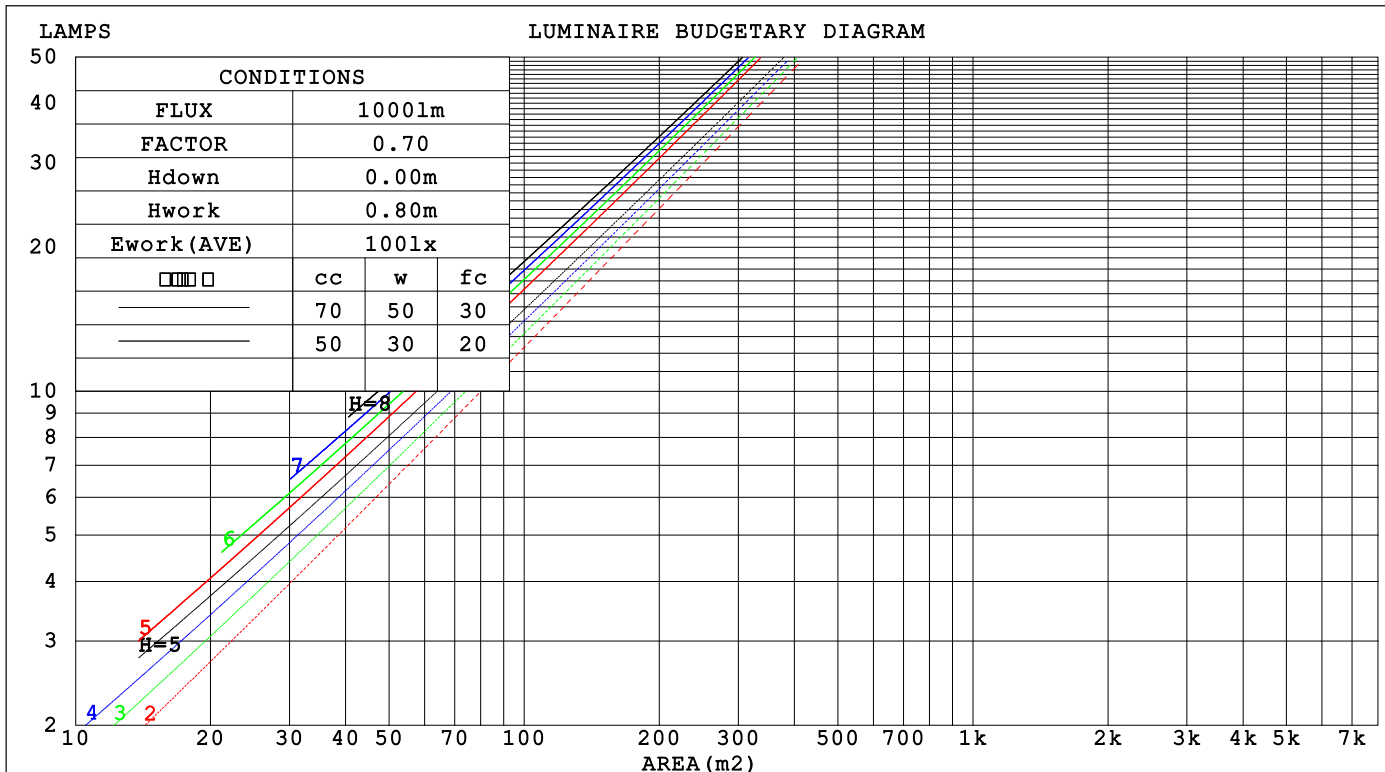

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:XLEN
Test Date:2022-06-17

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.151 .086 .027	.144 .082 .026	.132 .076 .024	.120 .069 .022	.110 .064 .021	
2.0	.142 .078 .024	.136 .075 .023	.126 .070 .022	.116 .065 .020	.108 .061 .019	
3.0	.133 .071 .021	.129 .069 .021	.120 .065 .020	.112 .061 .019	.104 .058 .018	
4.0	.126 .065 .019	.122 .064 .019	.114 .061 .018	.108 .058 .017	.101 .055 .017	
5.0	.119 .061 .018	.116 .059 .017	.109 .057 .017	.103 .055 .016	.098 .052 .016	
6.0	.113 .057 .016	.110 .056 .016	.105 .054 .016	.099 .052 .015	.095 .050 .015	
7.0	.108 .053 .015	.105 .052 .015	.100 .051 .015	.096 .049 .014	.091 .048 .014	
8.0	.103 .050 .014	.100 .049 .014	.096 .048 .014	.092 .047 .013	.088 .045 .013	
9.0	.098 .048 .013	.096 .047 .013	.092 .046 .013	.089 .045 .013	.086 .043 .013	
10.0	.094 .045 .013	.092 .045 .012	.089 .044 .012	.086 .043 .012	.083 .042 .012	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.169 .158 .147	.145 .135 .126	.099 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.152 .133 .116	.130 .114 .100	.089 .079 .070	.052 .046 .041	.017 .015 .013	
3.0	.138 .113 .094	.118 .098 .081	.081 .068 .057	.047 .040 .034	.015 .013 .011	
4.0	.126 .098 .077	.108 .085 .067	.075 .059 .047	.043 .035 .028	.014 .011 .009	
5.0	.117 .086 .064	.100 .075 .055	.069 .052 .039	.040 .031 .023	.013 .010 .008	
6.0	.108 .076 .054	.093 .066 .047	.064 .046 .033	.037 .027 .020	.012 .009 .006	
7.0	.101 .068 .046	.087 .059 .040	.060 .042 .028	.035 .025 .017	.011 .008 .006	
8.0	.095 .062 .039	.082 .054 .034	.056 .038 .024	.033 .022 .014	.011 .007 .005	
9.0	.089 .056 .034	.077 .049 .030	.053 .034 .021	.031 .020 .013	.010 .007 .004	
10.0	.085 .052 .030	.073 .045 .026	.051 .032 .019	.029 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:XLEN
Test Date:2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.61lx1 lm										
NAME: 3W磁吸轨道灯					TYPE:			WEIGHT:		
SPEC.: 4000K/黑色/20度					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2.3	3.1	2.5	3.2	3.4	0.1	0.8	0.3	1.0	1.1
3H	2.3	3.0	2.6	3.2	3.4	0.1	0.8	0.3	1.0	1.2
4H	2.3	3.0	2.6	3.2	3.4	0.0	0.7	0.3	0.9	1.1
6H	2.3	2.9	2.5	3.1	3.4	-0.1	0.5	0.2	0.8	1.0
8H	2.2	2.8	2.5	3.1	3.3	-0.1	0.5	0.2	0.7	1.0
12H	2.2	2.7	2.5	3.0	3.3	-0.2	0.4	0.1	0.7	0.9
4H 2H	2.2	2.8	2.4	3.0	3.2	-0.0	0.6	0.2	0.8	1.1
3H	2.2	2.8	2.5	3.0	3.3	0.0	0.6	0.3	0.8	1.1
4H	2.2	2.7	2.5	3.0	3.3	-0.1	0.5	0.3	0.7	1.1
6H	2.1	2.6	2.5	2.9	3.2	-0.2	0.3	0.2	0.6	1.0
8H	2.1	2.5	2.4	2.8	3.2	-0.2	0.2	0.2	0.6	0.9
12H	2.0	2.4	2.4	2.8	3.2	-0.3	0.1	0.1	0.5	0.9
8H 4H	2.1	2.5	2.4	2.8	3.2	-0.2	0.2	0.2	0.6	1.0
6H	2.0	2.3	2.4	2.7	3.1	-0.3	0.1	0.1	0.4	0.9
8H	1.9	2.2	2.3	2.6	3.1	-0.4	-0.0	0.1	0.4	0.8
12H	1.8	2.1	2.3	2.6	3.0	-0.4	-0.1	0.0	0.3	0.8
12H 4H	2.0	2.4	2.4	2.8	3.2	-0.2	0.2	0.2	0.5	0.9
6H	1.9	2.2	2.3	2.6	3.1	-0.4	-0.0	0.1	0.4	0.8
8H	1.8	2.1	2.3	2.6	3.0	-0.4	-0.1	0.0	0.3	0.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / - 4.6					+ 2.2 / - 4.7				
1.5H	+ 4.8 / - 4.7					+ 3.5 / - 3.9				
2.0H	+ 4.9 / - 3.9					+ 3.9 / - 2.9				

CIE Pub.117, 227.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.1)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:XLEN
Test Date:2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	89	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	109	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: XLEN
 Test Date: 2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

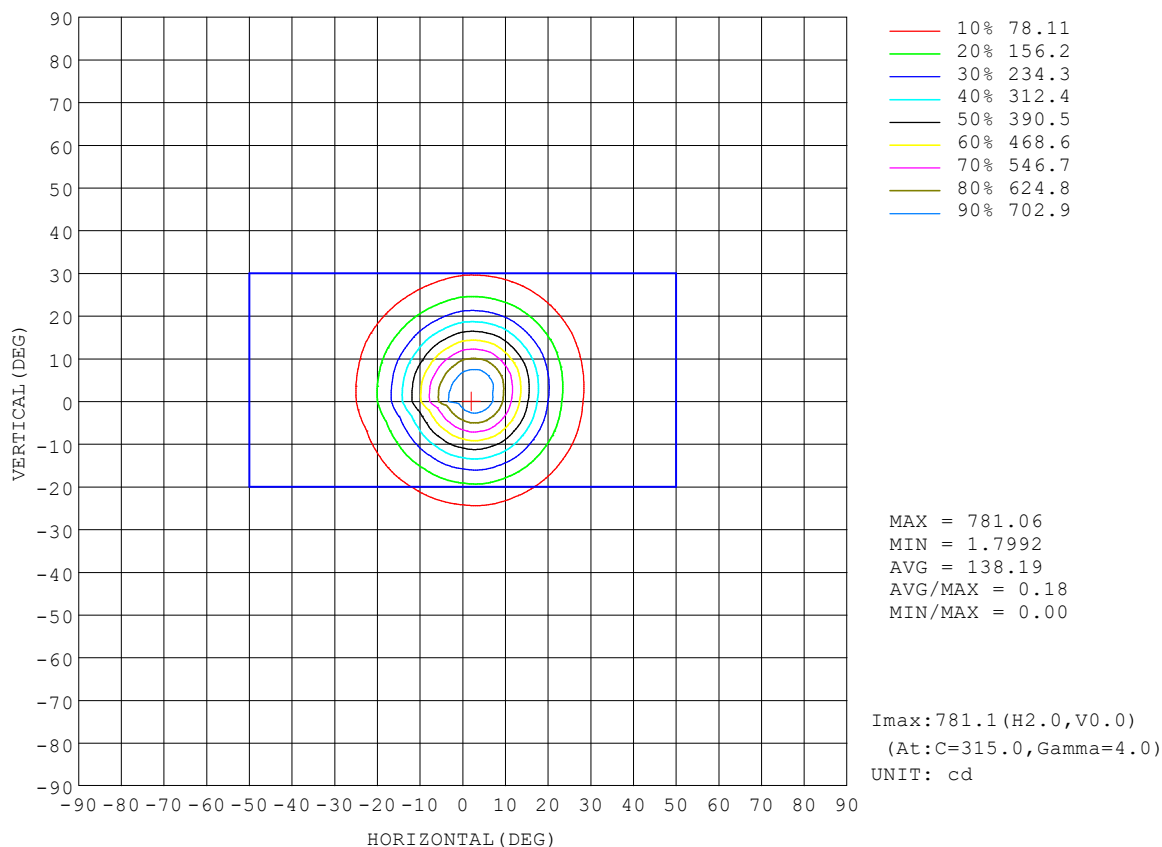


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: XLEN
Test Date: 2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity: 65.0%
Test Distance: 9.420m [K=1.0000]
Remarks:

AAI Figure

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.61lx1 lm		
NAME: 3w磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

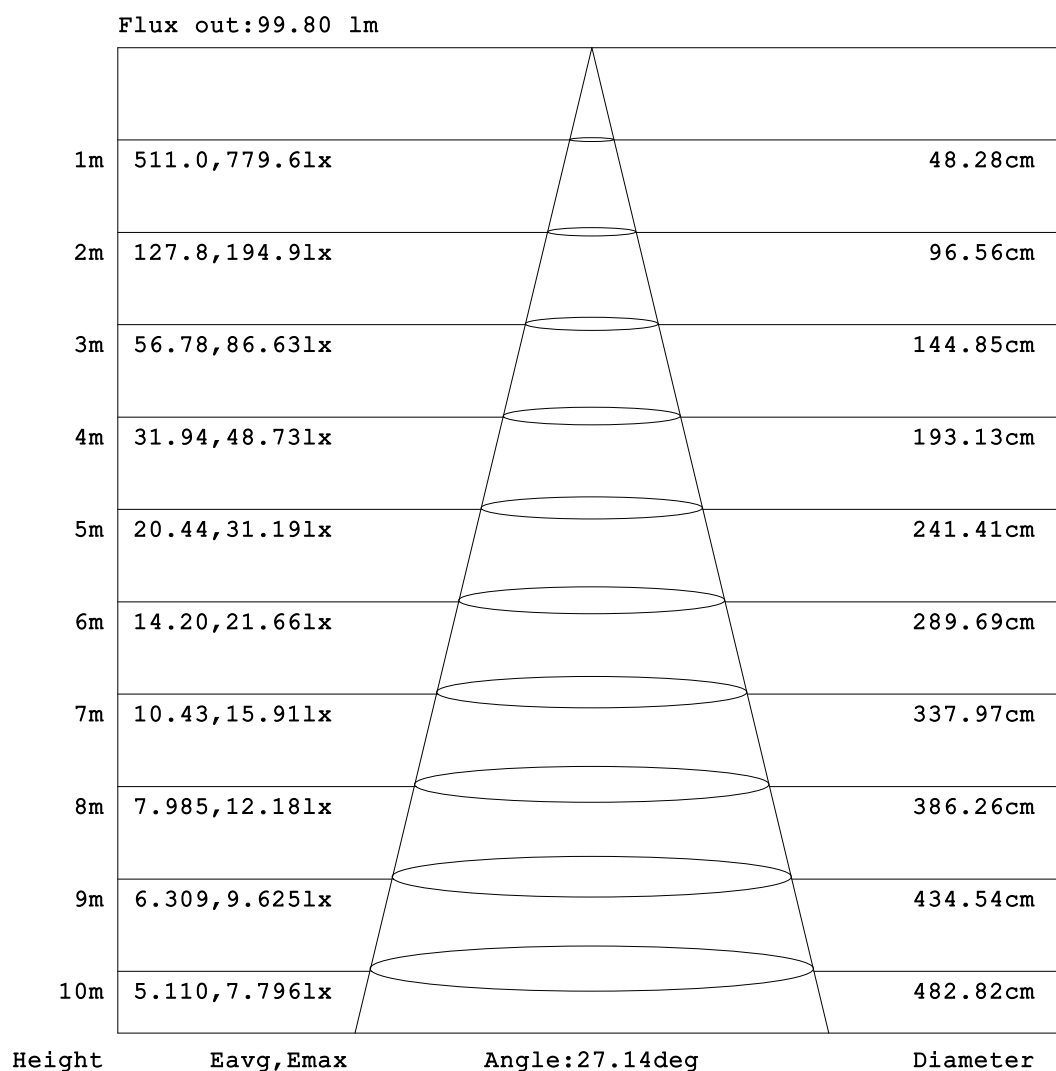


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: XLEN
 Test Date: 2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

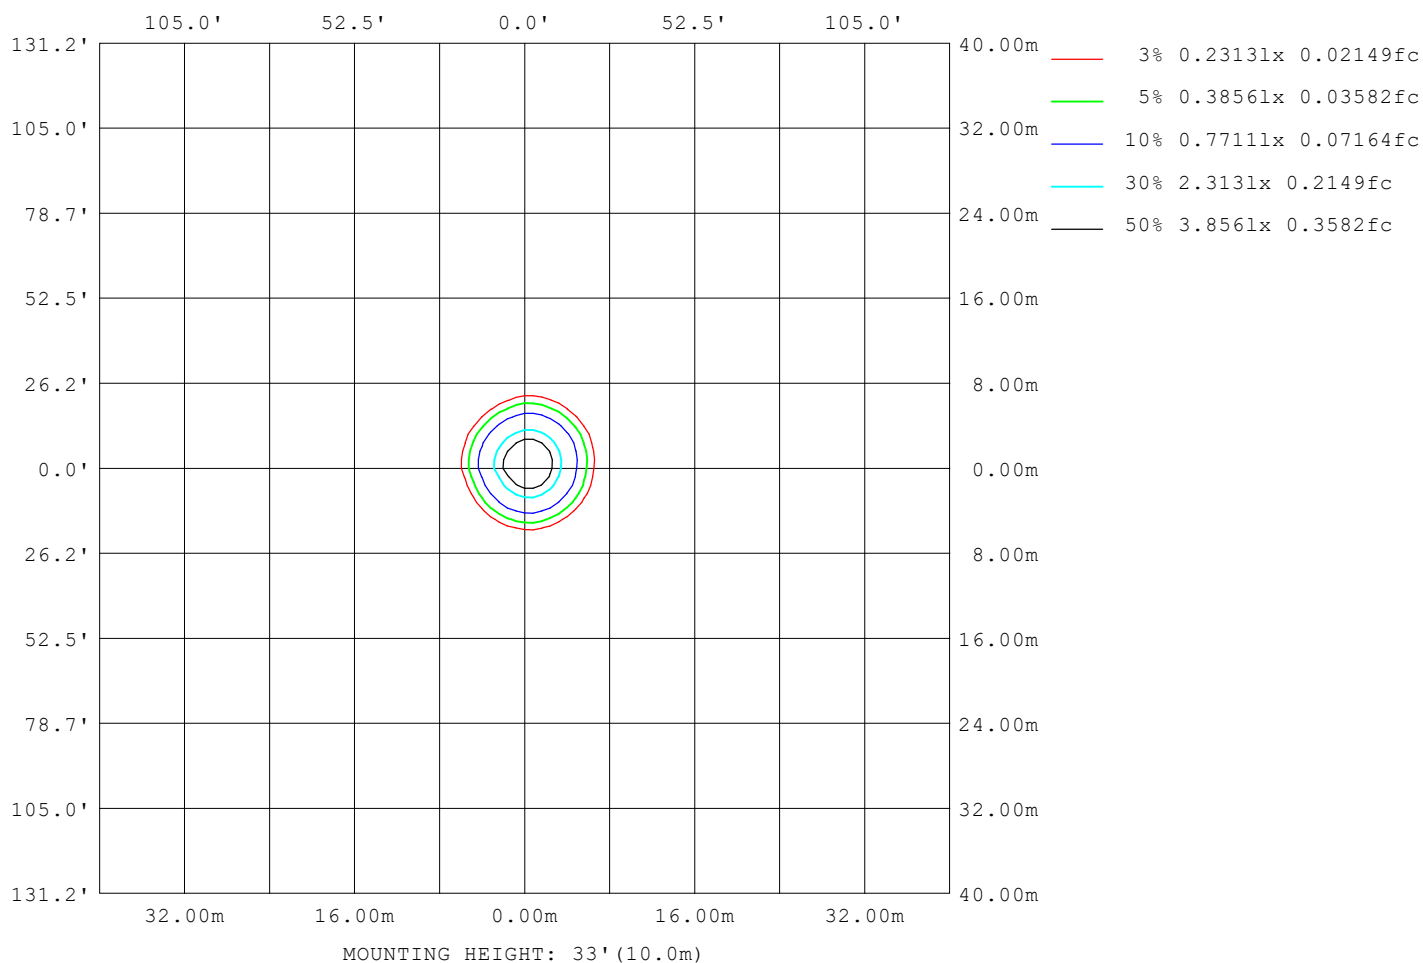

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:XLEN
Test Date:2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21
L_0~180 (75) av	9
L_0~180 (85) av	0
L_90~270 (65) av	24
L_90~270 (75) av	9
L_90~270 (85) av	0
L_45 (65) av	20
L_45 (75) av	10
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:XLEN
Test Date:2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

Planar Illuminance Curve

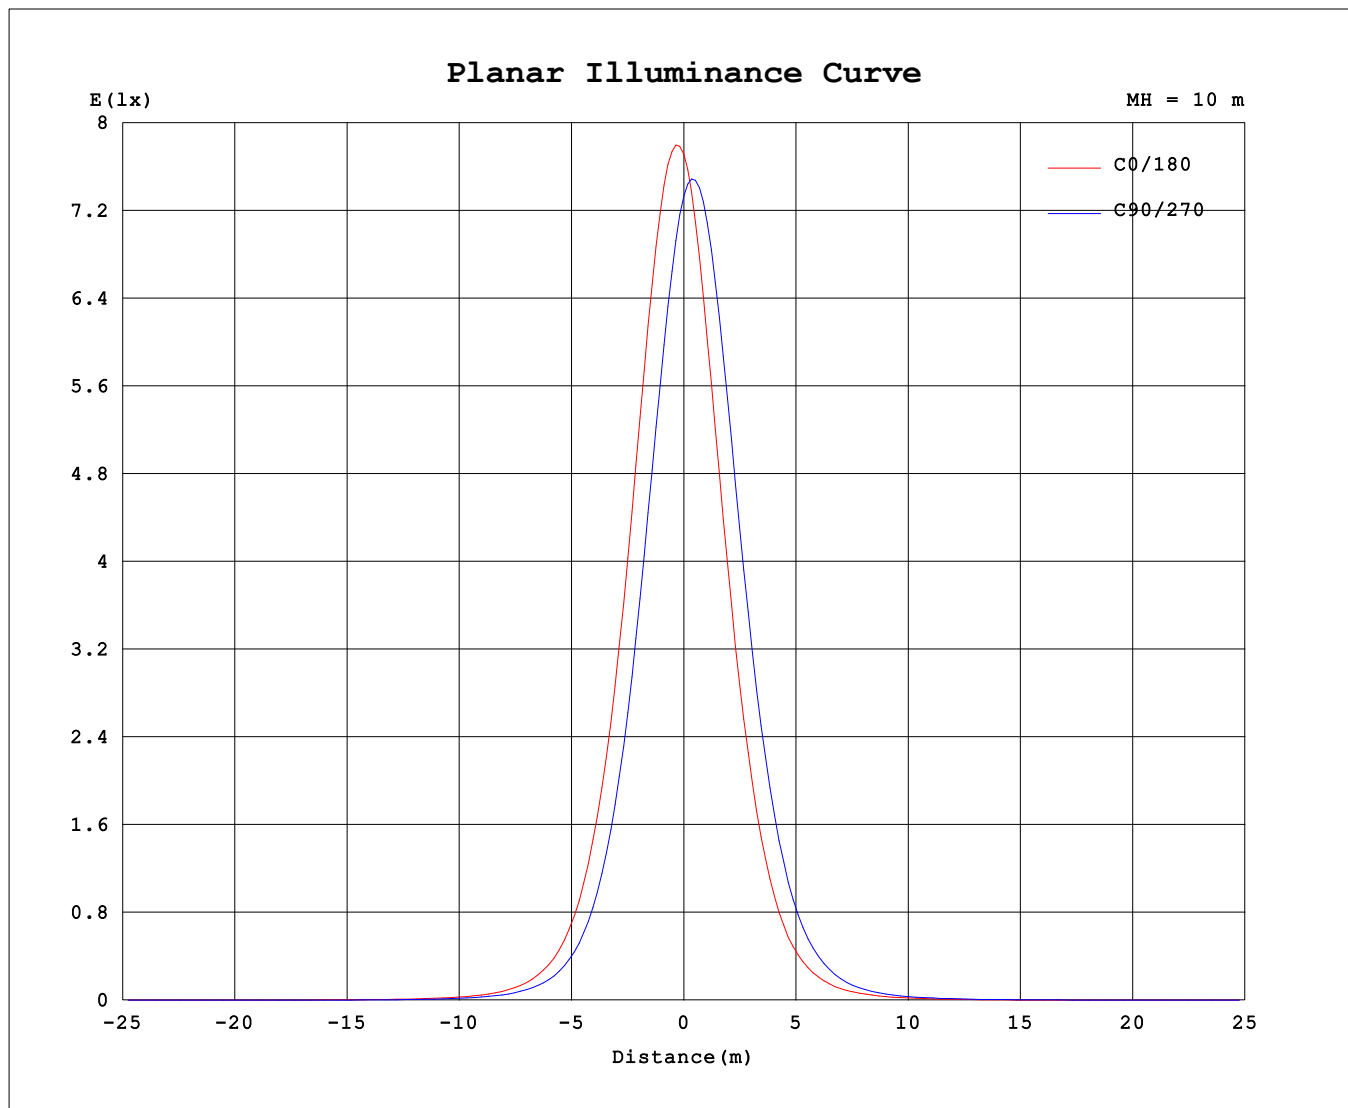

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: XLEN
Test Date: 2022-06-17

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity: 65.0%
Test Distance: 9.420m [K=1.0000]
Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

```

Test:U:11.990V I:0.2250A P:2.6900W PF:0.0000 Freq:49.99Hz Lamp Flux:227.611x1 lm		
NAME: 3W磁吸轨道灯	TYPE:	WEIGHT:
SPEC.: 4000K/黑色/20度	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

UNIT: cd

[illegible]

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

```