


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.46 lm/W			
MODEL	XHP35 HI	Imax(cd)	20933	S/MH(C0/180)	0.19
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.09
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	471.39	η UP,DN(C0-180)	0.5,52.5
NOMINAL FLUX(lm)	471.391	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,46.6
LAMPS INSIDE	1	η up(%)	0.9	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	230	η down(%)	99.1	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

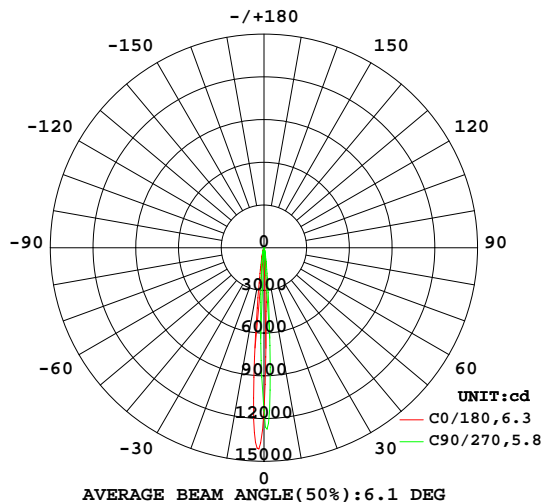

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

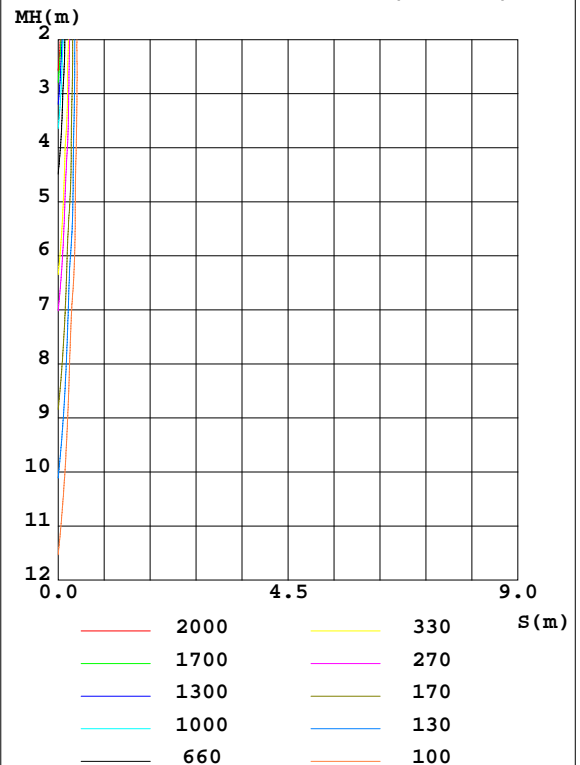

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	39.03	43.93	76.84	189.3	138.3	113.6	77.61	56.00	0- 10	319.7	319.7	67.8,67.8
20	6.342	7.042	11.17	23.19	18.95	18.23	13.88	9.594	10- 20	101.3	421.0	89.3,89.3
30	1.926	2.034	2.876	5.245	4.219	4.180	3.208	2.712	20- 30	31.88	452.8	96.1,96.1
40	0.5062	0.5619	0.9150	1.474	1.053	0.9949	0.7971	0.7099	30- 40	11.72	464.6	98.5,98.5
50	0	0	0.0005	0.0768	0.0160	0	0	0	40- 50	2.641	467.2	99.1,99.1
60	0	0	0	0	0	0	0	0	50- 60	0.0068	467.2	99.1,99.1
70	0	0	0	0	0	0	0	0	60- 70	0	467.2	99.1,99.1
80	0	0	0	0	0	0	0	0	70- 80	0	467.2	99.1,99.1
90	0	0	0	0	0	0	0	0	80- 90	0	467.2	99.1,99.1
100	0	0	0	0	0	0	0	0	90-100	0	467.2	99.1,99.1
110	0	0	0	0	0	0	0	0	100-110	0	467.2	99.1,99.1
120	0	0	0	0	0	0	0	0	110-120	0	467.2	99.1,99.1
130	0	0	0	0	0	0	0	0	120-130	0	467.2	99.1,99.1
140	0.2037	0.1829	0.1054	0	0	0	0	0.0755	130-140	0.0902	467.3	99.1,99.1
150	0.3307	0.3302	0.3532	0.3854	0.2273	0.2443	0.3136	0.4187	140-150	1.335	468.6	99.4,99.4
160	0.3516	0.3464	0.4098	0.4818	0.3484	0.3540	0.4126	0.4638	150-160	1.739	470.4	99.8,99.8
170	0.0026	0.0140	0.2104	0.2812	0.3001	0.1857	0.1966	0	160-170	0.9663	471.3	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0600	471.4	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

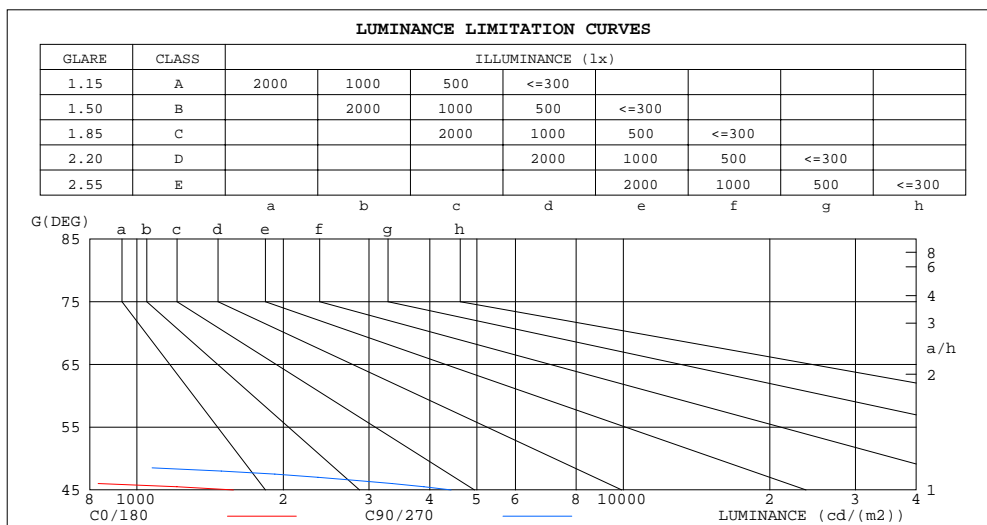

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	0	0
55	0	0
50	0	7
45	1579	4427


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 23DEG
Operators: xyj
Test Date: 2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 5.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.14	1.12	1.11	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02	1.00	.00	.99	.97
2.0	1.10	1.07	1.05	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.01	.99	.99	.98	.97	.96
3.0	1.06	1.03	1.01	1.05	1.02	1.00	1.03	1.00	.99	1.00	.99	.97	.98	.97	.96	.94
4.0	1.04	1.00	.98	1.02	.00	.97	1.00	.98	.96	.99	.97	.95	.97	.95	.94	.93
5.0	1.01	.98	.96	1.00	.97	.95	.99	.96	.94	.97	.95	.93	.96	.94	.93	.92
6.0	.99	.96	.93	.98	.95	.93	.97	.94	.93	.96	.94	.92	.95	.93	.91	.90
7.0	.97	.94	.92	.97	.94	.91	.95	.93	.91	.94	.92	.91	.93	.92	.90	.89
8.0	.95	.92	.90	.95	.92	.90	.94	.91	.90	.93	.91	.89	.92	.90	.89	.88
9.0	.94	.91	.89	.93	.91	.89	.93	.90	.88	.92	.90	.88	.91	.89	.88	.87
10.0	.93	.90	.88	.92	.89	.88	.92	.89	.87	.91	.89	.87	.90	.88	.87	.86

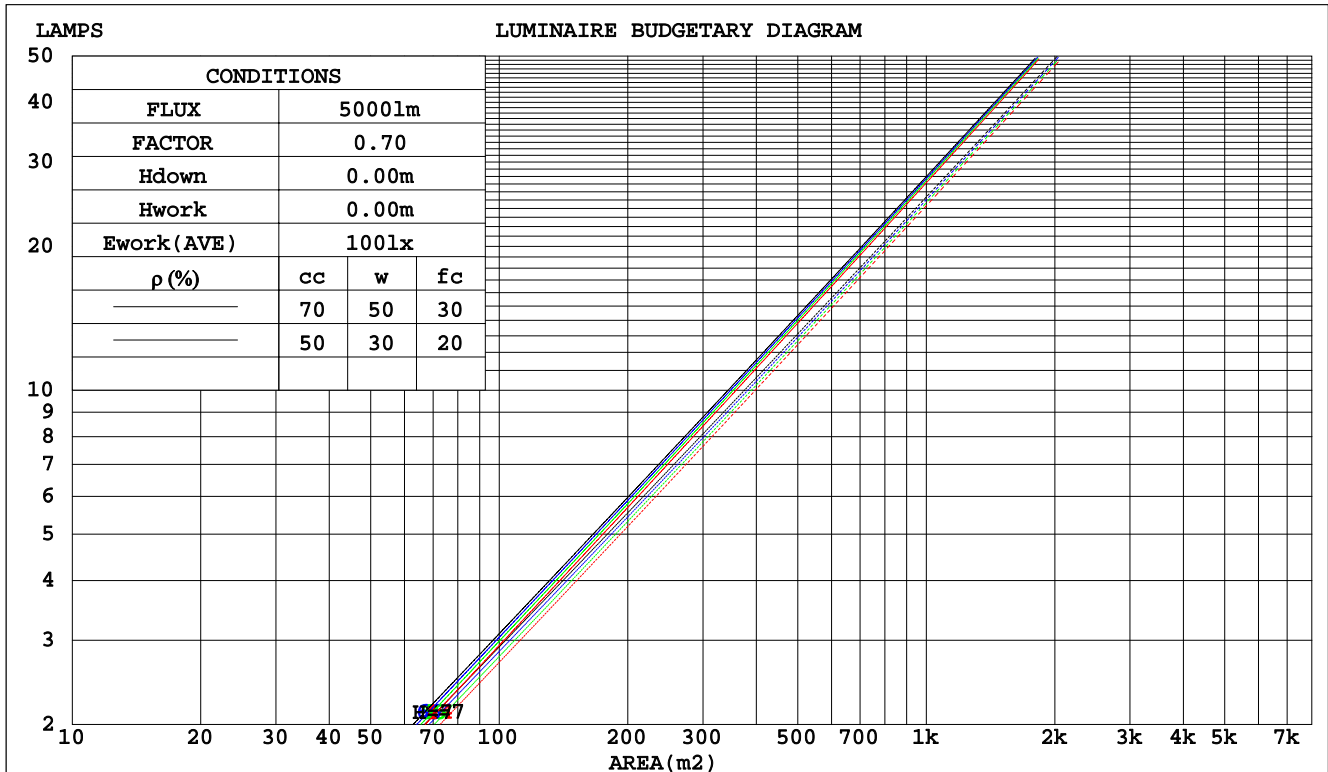

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:23DEG
Operators:xyj
Test Date:2018-02-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.300m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.115	.065	.021	.108	.062	.020	.095	.055	.017	.083	.048	.015	.073	.042	.014	
2.0	.104	.057	.018	.099	.054	.017	.088	.049	.015	.079	.044	.014	.070	.039	.012	
3.0	.095	.051	.015	.091	.049	.015	.082	.045	.014	.074	.041	.012	.067	.037	.011	
4.0	.088	.046	.013	.084	.044	.013	.077	.041	.012	.070	.038	.011	.064	.035	.011	
5.0	.082	.042	.012	.078	.040	.012	.072	.038	.011	.066	.035	.010	.061	.033	.010	
6.0	.076	.038	.011	.073	.037	.011	.068	.035	.010	.063	.033	.010	.059	.031	.009	
7.0	.071	.035	.010	.069	.034	.010	.064	.033	.009	.060	.031	.009	.056	.029	.009	
8.0	.067	.033	.009	.065	.032	.009	.061	.031	.009	.058	.029	.008	.054	.028	.008	
9.0	.064	.031	.009	.062	.030	.008	.058	.029	.008	.055	.028	.008	.052	.026	.008	
10.0	.060	.029	.008	.059	.028	.008	.056	.027	.008	.053	.026	.007	.050	.025	.007	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.174	.165	.157	.149	.141	.135	.102	.097	.093	.058	.056	.054	.019	.018	.018	
2.0	.154	.140	.128	.132	.120	.110	.090	.083	.077	.052	.048	.045	.017	.016	.015	
3.0	.138	.120	.106	.118	.104	.092	.081	.072	.064	.047	.042	.038	.015	.014	.012	
4.0	.124	.104	.089	.106	.090	.078	.073	.063	.055	.042	.037	.032	.014	.012	.011	
5.0	.112	.092	.076	.097	.079	.066	.067	.055	.047	.039	.033	.028	.012	.011	.009	
6.0	.103	.081	.066	.088	.070	.057	.061	.049	.041	.035	.029	.024	.011	.009	.008	
7.0	.094	.073	.058	.081	.063	.050	.056	.044	.036	.033	.026	.021	.011	.009	.007	
8.0	.087	.066	.051	.075	.057	.044	.052	.040	.031	.030	.024	.019	.010	.008	.006	
9.0	.081	.060	.045	.070	.052	.039	.048	.036	.028	.028	.021	.017	.009	.007	.006	
10.0	.076	.055	.041	.065	.047	.035	.045	.033	.025	.026	.020	.015	.009	.006	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: EN-TLO010-01 BLACK					TYPE:LED TRACK LIGHT					WEIGHT:				
SPEC.:CRI93 3000K					DIM.:					SERIAL No.:				
MFR.:					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					3.8	4.3	4.0	4.5	4.6	5.3	5.8	5.5	5.9	6.1
3H					3.7	4.1	3.9	4.3	4.5	5.1	5.6	5.4	5.8	6.0
4H					3.6	4.0	3.9	4.3	4.5	5.1	5.5	5.3	5.7	5.9
6H					3.5	3.9	3.8	4.2	4.4	5.0	5.4	5.3	5.6	5.9
8H					3.5	3.9	3.8	4.1	4.4	4.9	5.3	5.2	5.6	5.9
12H					3.4	3.8	3.7	4.1	4.4	4.9	5.3	5.2	5.5	5.8
4H 2H					3.6	4.0	3.9	4.3	4.5	5.1	5.5	5.3	5.7	5.9
3H					3.4	3.8	3.7	4.1	4.4	4.9	5.3	5.2	5.5	5.8
4H					3.3	3.7	3.7	4.0	4.3	4.8	5.1	5.1	5.5	5.8
6H					3.2	3.5	3.6	3.9	4.2	4.7	5.0	5.1	5.3	5.7
8H					3.2	3.5	3.6	3.8	4.2	4.6	4.9	5.0	5.3	5.7
12H					3.1	3.4	3.5	3.8	4.2	4.6	4.8	5.0	5.2	5.6
8H 4H					3.2	3.5	3.6	3.8	4.2	4.6	4.9	5.0	5.3	5.7
6H					3.0	3.3	3.5	3.7	4.1	4.5	4.8	4.9	5.2	5.6
8H					3.0	3.2	3.4	3.6	4.1	4.4	4.7	4.9	5.1	5.5
12H					2.9	3.1	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.5
12H 4H					3.1	3.4	3.5	3.8	4.2	4.6	4.8	5.0	5.2	5.6
6H					3.0	3.2	3.4	3.6	4.1	4.4	4.7	4.9	5.1	5.5
8H					2.9	3.1	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.5
Variations with the observer position at spacings:														
S = 1.0H					+ 3.3 / - 1.\$					+ 3.8 / - 1.\$				
1.5H					+ 6.0 / - 1.\$					+ 6.2 / - 1.\$				
2.0H					+ 9.6 / - 1.\$					+ 9.7 / - 1.\$				

CIE Pub.117, 471.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.6)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:23DEG
Operators:xyj
Test Date:2018-02-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	91	85	82	90	85	82	89	84	81	78
0.80	98	92	89	97	92	89	96	91	89	85
1.00	101	96	93	101	96	93	99	95	92	89
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	106	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended							SHRNM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

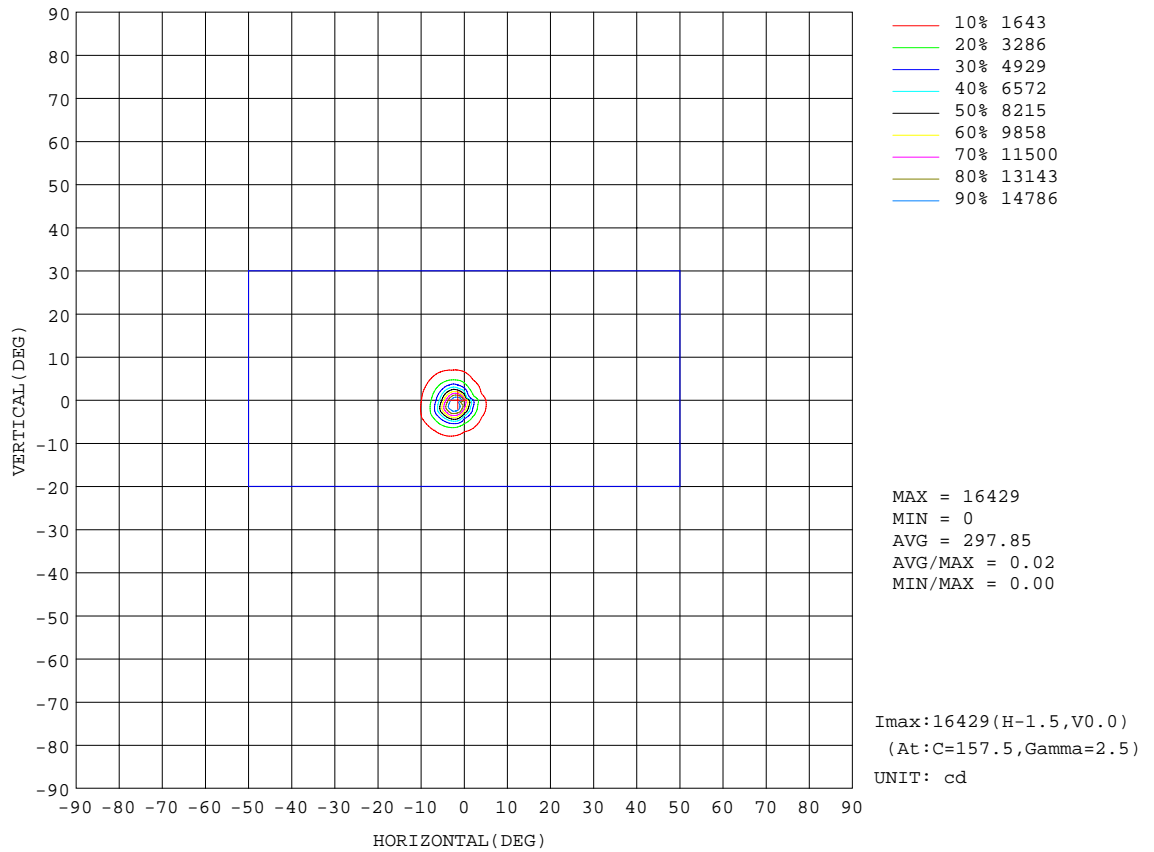


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:23DEG
Operators:xyj
Test Date:2018-02-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.300m [K=1.0000]
Remarks:

AAI Figure

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

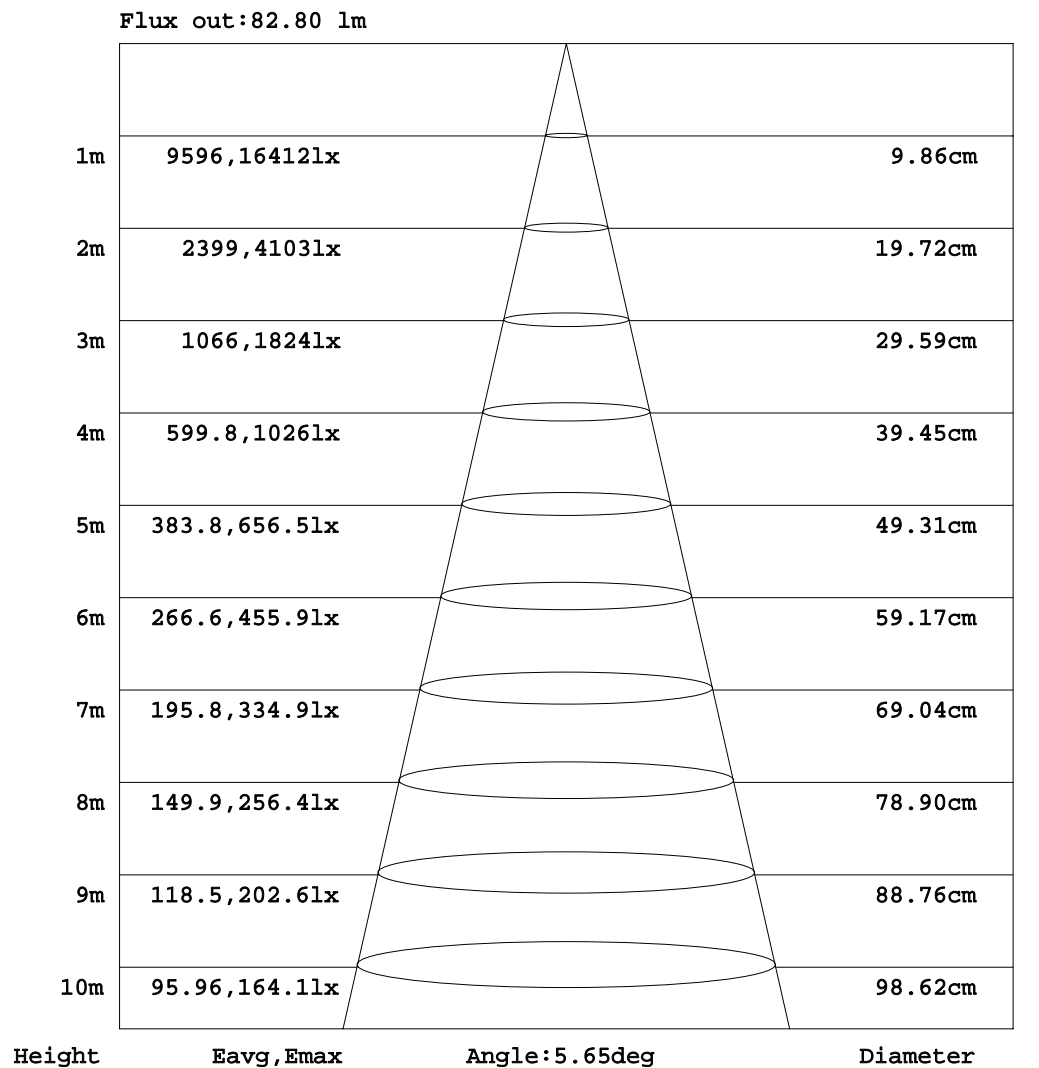


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

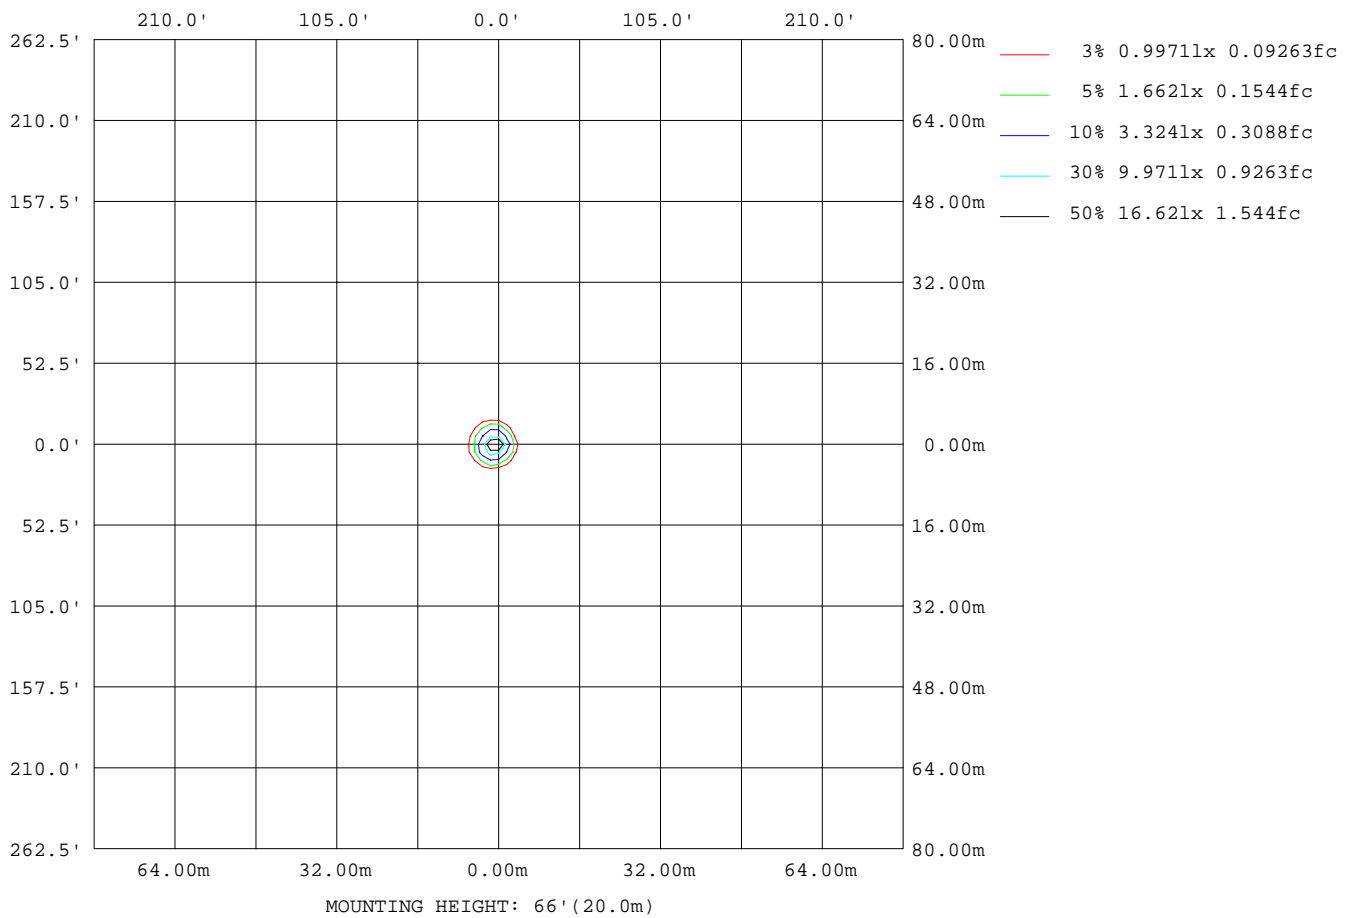

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:23DEG
Operators:xyj
Test Date:2018-02-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.300m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	0
L_0~180(75)av	0
L_0~180(85)av	0
L_90~270(65)av	0
L_90~270(75)av	0
L_90~270(85)av	0
L_45(65)av	0
L_45(75)av	0
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:23DEG
 Operators:xyj
 Test Date:2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.300m [K=1.0000]
 Remarks:

Planar Illuminance Curve

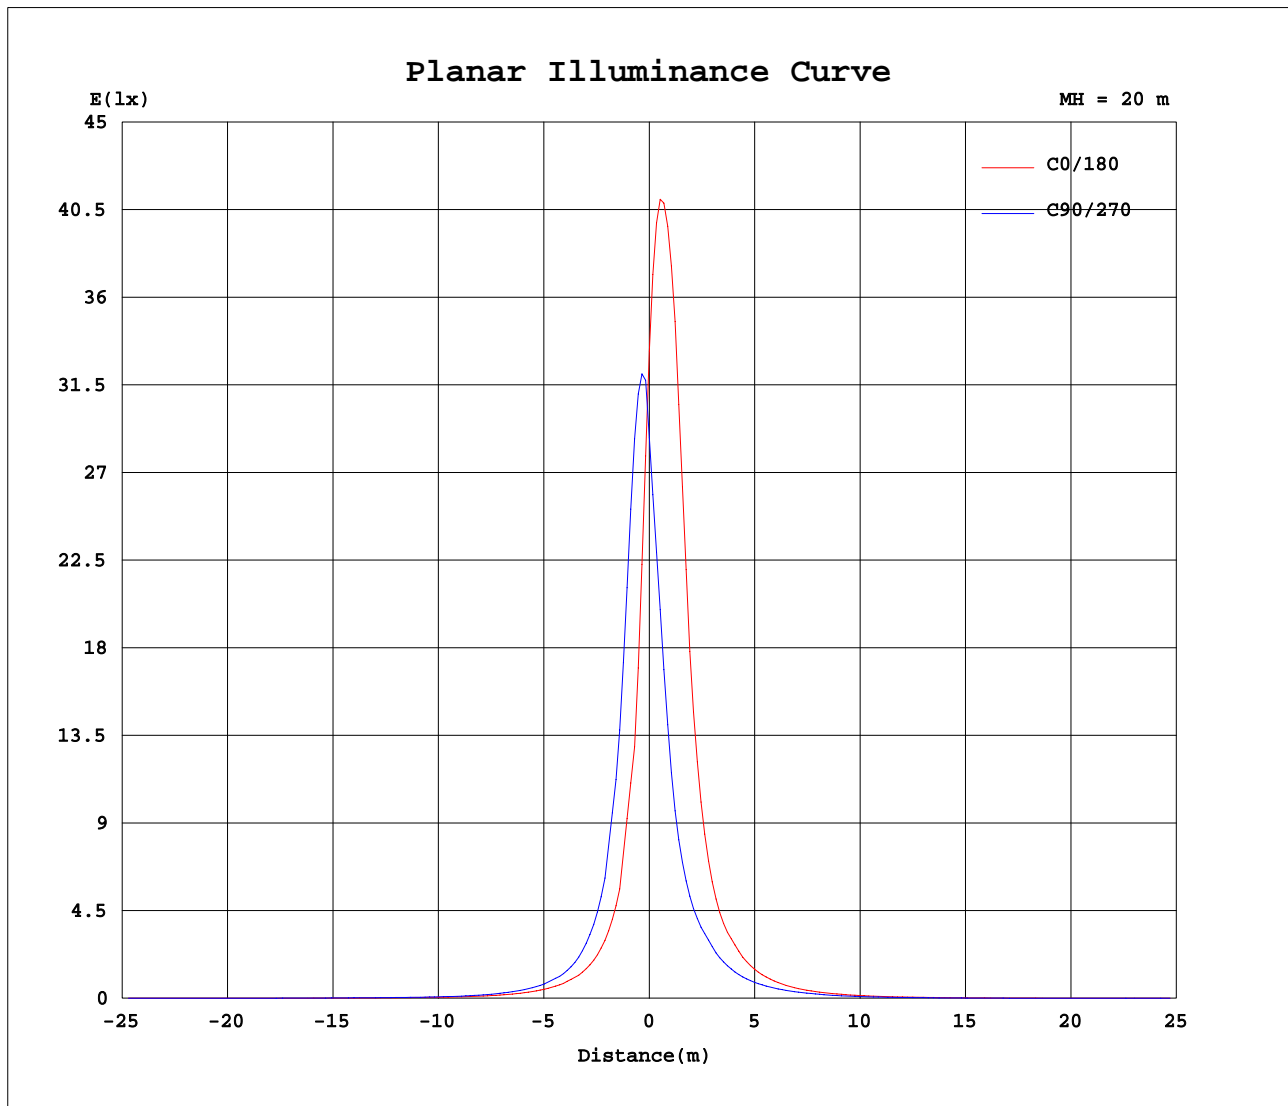

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 23DEG
Operators: xyj
Test Date: 2018-02-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 5.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: EN-TLO010-01 BLACK	TYPE:LED TRACK LIGHT	WEIGHT:
SPEC.:CRI93 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144			
5	141	163	179	250	383	890	1279	1547	766	604	427	307	242	201	182	166			
10	39.0	41.5	43.9	58.3	76.8	152	189	249	138	129	114	88.0	77.6	65.9	56.0	51.5			
15	14.6	15.5	16.3	20.7	26.4	45.5	58.0	76.8	46.3	46.5	42.2	34.3	30.4	26.4	21.9	19.6			
20	6.34	6.70	7.04	8.81	11.2	18.8	23.2	29.9	19.0	19.4	18.2	15.1	13.9	11.56	9.59	8.69			
25	3.20	3.34	3.44	4.22	5.20	8.53	10.48	13.6	8.64	8.88	8.45	7.18	6.36	5.50	4.67	4.39			
30	1.93	1.97	2.03	2.43	2.88	4.32	5.24	6.54	4.22	4.44	4.18	3.53	3.21	3.01	2.71	2.65			
35	1.01	1.05	1.10	1.44	1.83	2.59	2.89	3.53	2.21	2.23	2.02	1.65	1.55	1.51	1.43	1.38			
40	0.51	0.53	0.56	0.72	0.91	1.33	1.47	1.75	1.05	1.14	0.99	0.86	0.80	0.75	0.71	0.67			
45	0.11	0.14	0.16	0.26	0.37	0.62	0.62	0.71	0.40	0.41	0.33	0.23	0.21	0.15	0.14	0.12			
50	0.00	0.00	0.00	0.00	0.00	0.10	0.08	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.20	0.20	0.18	0.14	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.12			
145	0.29	0.29	0.29	0.28	0.28	0.29	0.26	0.25	0.05	0.08	0.10	0.15	0.20	0.29	0.32	0.36			
150	0.33	0.34	0.33	0.34	0.35	0.40	0.39	0.40	0.23	0.24	0.24	0.27	0.31	0.40	0.42	0.46			
155	0.35	0.36	0.35	0.37	0.39	0.45	0.45	0.47	0.30	0.31	0.31	0.34	0.38	0.46	0.47	0.50			
160	0.35	0.35	0.35	0.38	0.41	0.48	0.48	0.51	0.35	0.36	0.35	0.37	0.41	0.49	0.46	0.47			
165	0.27	0.24	0.24	0.34	0.39	0.47	0.47	0.52	0.36	0.37	0.35	0.37	0.41	0.44	0.26	0.26			
170	0.00	0.00	0.01	0.14	0.21	0.27	0.28	0.43	0.30	0.28	0.19	0.16	0.20	0.11	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.01	0.01	0.04	0.08	0.06	0.05	0.04	0.02	0.02	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:23DEG
Operators:xyj
Test Date:2018-02-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.300m [K=1.0000]
Remarks: